



SIDE VIEW

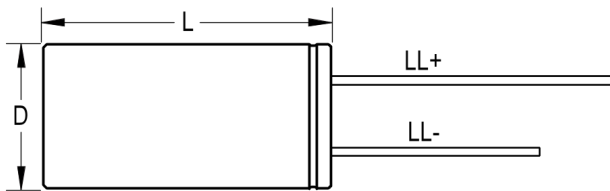

TERMINAL END VIEW



Click [here](#) for the 3D model.

### Dimensions

|             |              |
|-------------|--------------|
| D           | 5mm +/-0.5mm |
| L           | 11mm +1.5mm  |
| S           | 2mm +/-0.5mm |
| LL Negative | 15mm MIN     |
| LL Positive | 20mm MIN     |
| F           | 0.5mm NOM    |

### Packaging Specifications

|           |           |
|-----------|-----------|
| Packaging | Bulk, Bag |
|-----------|-----------|

### General Information

|             |                                     |
|-------------|-------------------------------------|
| Series      | ESK                                 |
| Dielectric  | Aluminum Electrolytic               |
| Description | Single Ended, Aluminum Electrolytic |
| RoHS        | Yes                                 |
| Lead        | Wire Leads                          |
| AEC-Q200    | No                                  |

### Specifications

|                         |                        |
|-------------------------|------------------------|
| Capacitance             | 1 uF                   |
| Capacitance Tolerance   | 20%                    |
| Voltage DC              | 50 VDC, 63 VDC (Surge) |
| Temperature Range       | -40/+85°C              |
| Rated Temperature       | 85°C                   |
| Life                    | 2000 Hrs               |
| Dissipation Factor      | 10% 120Hz 20C          |
| Ripple Current          | 10 mAmps (120Hz 85C)   |
| Leakage Current         | 3 uA (2min 20°C)       |
| Impedance Ratio at -25C | 3                      |
| Impedance Ratio at -40C | 3                      |