


# SMP253MA4100MTV24

Aliases (P101AA102M250Y)

Recommended Replacement SMP253EA4100MB31TV24

SMP253 250 VAC, Film, Metallized Paper, Automotive Safety, 1,000 pF, 20%, 1,500 VDC, 250 VAC, 100°C, 6.5 mm, 5045 / 127114

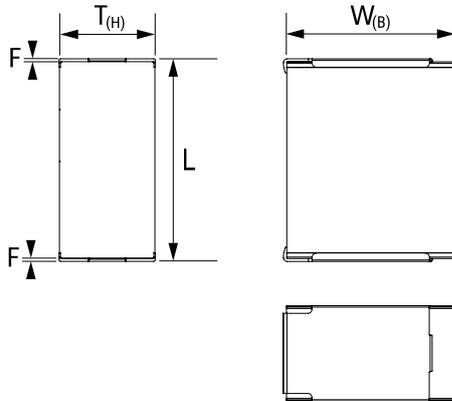

Note: '()' correspond to the letters used in the product bulletin

Click [here](#) for the 3D model.

## General Information

|                          |  |
|--------------------------|--|
| Series                   | SMP253 250 VAC   |
| Dielectric               | Metallized Paper   |
| Style                    | SMD Chip   |
| RoHS                     | Yes  |
| Termination              | Tin  |
| Safety Class             | Y2   |
| Qualifications           | ENEC, cULus  |
| Typical Component Weight | 1.6 g  |
| Notes                    | Recommended Replacement<br><a href="https://www.kemet.com/en/us/product/SMP253EA4100MB31TV24.html">https://www.kemet.com/en/us/product/SMP253EA4100MB31TV24.html</a> . |

| Dimensions           |               |
|----------------------|---------------|
| L                    | 12.7mm +0.4mm |
| W                    | 11.5mm +0.6mm |
| T                    | 6.5mm +0.4mm  |
| F                    | 0.5mm NOM     |
| Case Code (EIA / mm) | 5045 / 127114 |

| Packaging Specifications |                           |
|--------------------------|---------------------------|
| Packaging                | T&R, Vertical Orientation |
| Packaging Quantity       | 400                       |

| Specifications        |            |
|-----------------------|------------|
| Capacitance           | 1,000 pF   |
| Tolerance             | 20%        |
| Voltage DC            | 1500 VDC   |
| Voltage AC            | 250 VAC    |
| Temperature Range     | -40/+100°C |
| Rated Temperature     | 100°C      |
| Dissipation Factor    | 1.3% 1kHz  |
| Insulation Resistance | 12 GOhms   |
| Max dV/dt             | 2,000 V/us |

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.