


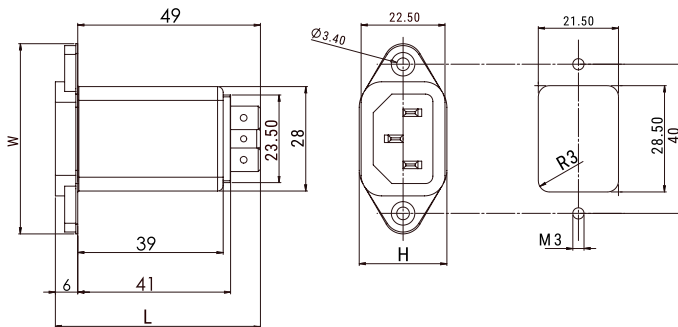

Click [here](#) for the 3D model.

#### General Information

|                |                                              |
|----------------|----------------------------------------------|
| Series         | FBN                                          |
| Style          | Chassis Mount                                |
| Description    | Compact, Lightweight with metallic enclosure |
| Features       | Compact, lightweight                         |
| RoHS           | Yes                                          |
| Qualifications | IEC/EN 60939, UL, CSA                        |
| AEC-Q200       | No                                           |
| Lead           | Fast On                                      |
| Terminal Type  | Faston                                       |

#### Dimensions

|      |            |
|------|------------|
| L    | 55mm NOM   |
| W    | 51mm NOM   |
| H    | 23.5mm NOM |
| Lead | Fast On    |

#### Packaging Specifications

|                    |      |
|--------------------|------|
| Packaging          | Bulk |
| Packaging Quantity | 1    |

#### Specifications

|                          |           |
|--------------------------|-----------|
| Voltage AC               | 250 VAC   |
| Rated Frequency          | 50-60 Hz  |
| Rated Current            | 10 A      |
| Ripple Current           | 10 A      |
| Rated Temperature        | 40°C      |
| Temperature Range        | -25/+85°C |
| Climate Category         | 25/085/21 |
| Test Voltage DC (P to P) | 1700 VDC  |
| Test Voltage DC (P to E) | 3000 VDC  |
| Leakage Current          | 0.21 mA   |
| ESR                      | 1 MOhms   |

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.