



## PEG124MA2220QE4

PEG124\_125C, Aluminum, Aluminum Electrolytic, 22 uF, -10/+30%, 63 VDC, -40/+125°C

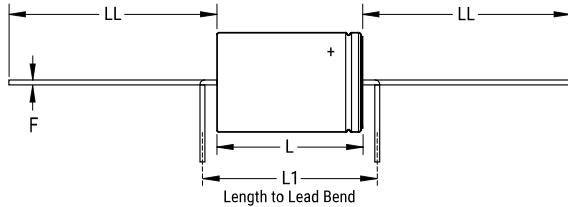

Click [here](#) for the 3D model.

### General Information

|                          |                                                                                                                                                                                                      |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Series                   | PEG124_125C                                                                                                                                                                                          |
| Dielectric               | Aluminum Electrolytic                                                                                                                                                                                |
| Style                    | Axial                                                                                                                                                                                                |
| Description              | Long Life Axial Aluminum Electrolytic                                                                                                                                                                |
| RoHS                     | Yes                                                                                                                                                                                                  |
| Lead                     | Wire Leads                                                                                                                                                                                           |
| AEC-Q200                 | No                                                                                                                                                                                                   |
| Halogen Free             | Yes                                                                                                                                                                                                  |
| Typical Component Weight | 3 g                                                                                                                                                                                                  |
| Miscellaneous            | Life Calculation Based On Maximum Ripple Current, Please Contact KEMET For More Information.                                                                                                         |
| Notes                    | L1 is KEMETs recommendation for minimum distance between symmetrical Lead bend. Available only for Customer specific part numbers. Lead bend dimensions must be specified and confirmed per article. |
| Shelf Life               | 156 Weeks                                                                                                                                                                                            |

### Dimensions

|    |                 |
|----|-----------------|
| D  | 10mm +/-0.5mm   |
| L  | 20mm +/-1mm     |
| L1 | 26mm MIN        |
| LL | 42mm +3/-2mm    |
| F  | 0.8mm +/-0.03mm |

### Packaging Specifications

|           |      |
|-----------|------|
| Packaging | Tray |
|-----------|------|

### Specifications

|                   |                                                 |
|-------------------|-------------------------------------------------|
| Capacitance       | 22 uF                                           |
| Tolerance         | -10/+30%                                        |
| Voltage DC        | 63 VDC                                          |
| Temperature Range | -40/+125°C                                      |
| Rated Temperature | 125°C                                           |
| Life              | 2000 Hrs                                        |
| ESR               | 3400 mOhms (100Hz 20C), 1200 mOhms (100kHz 20C) |
| Ripple Current    | 0.134 Amps (100Hz 125C), 1.1 Amps (5kHz 60C)    |
| Leakage Current   | 4 uA (5min 20°C)                                |

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.