


R73TI1100GY00J

Aliases (73TI1100GY00J)

R73, Film, Film/Foil Polypropylene, Automotive Grade, 1,000 pF, 5%, 1,600 VDC, 85° C, 15 mm

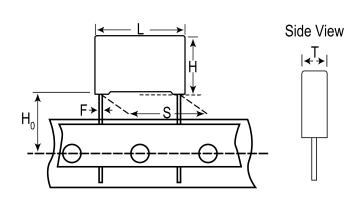

Click	horo	for	tho.	3D	model	

General Information		
Series	R73	
Dielectric	Film/Foil Polypropylene	
Style	Radial	
Features	Automotive Grade, Pulse	
RoHS	Yes	
Termination	Tinned Wire	
Lead	Wire Leads	
Qualifications	AEC-Q200	
AEC-Q200	Yes	
Typical Component Weight	1.25 g	
Miscellaneous	Above 85C DC And AC Voltage	

Dimensions		
L	18mm +0.3/-0.5mm	
Н	11mm +0.1/-0.5mm	
Т	5mm +0.2/-0.5mm	
S	15mm +0.6/-0.1mm	
НО	18.5mm +/-0.5mm	
F	0.8mm +/-0.05mm	

Packaging Specifications		
Packaging	T&R	
Packaging Quantity	600	

Specifications		
Capacitance	1,000 pF	
Tolerance	5%	
Voltage DC	1600 VDC	
Voltage AC	450 VAC	
Temperature Range	-55/+105°C	
Rated Temperature	85°C	
Dissipation Factor	0.03% 1kHz, 0.04% 10kHz, 0.1% 100kHz	
Insulation Resistance	100 GOhms	
Max dV/dt	34,000 V/us	
Inductance	10 nH	

Derating Is 1.25%/C.

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

Generated 10/29/2025 © 2006 - 2025 YAGEO