


Aliases (C1210C222JGRAC7800)

SMD Comm X7R HV, Ceramic, 2,200 pF, 5%, 2,000 VDC, X7R, SMD, MLCC, High Voltage, Temperature Stable, 1.5 mm, 1210 / 3225

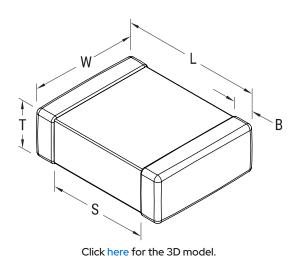

General Information		
Series	SMD Comm X7R HV	
Style	SMD Chip	
Description	SMD, MLCC, High Voltage, Temperature Stable	
Features	High Voltage	
RoHS	Yes	
Termination	Tin	
Marking	No	
AEC-Q200	No	
Typical Component Weight	85 mg	
Shelf Life	78 Weeks	
MSL	1	

2,200 pF

1 kHz 1.0Vrms

100 GOhms

Dimensions	
L	3.2mm +/-0.2mm
W	2.5mm +/-0.2mm
Т	1.7mm +/-0.20mm
S	1.5mm MIN
В	0.5mm +/-0.25mm
Case Code (EIA / mm)	1210 / 3225

Т	1.7mm +/-0.20mm
S	1.5mm MIN
В	0.5mm +/-0.25mm
Case Code (EIA / mm)	1210 / 3225
Packaging Specifications	

1.7mm +/-0.20mm	Tolerance	5%
1.5mm MIN	Voltage DC	2000 VDC
0.5mm +/-0.25mm	Dielectric Withstanding Voltage	2,400 VDC
1210 / 3225	Temperature Range	-55/+125°C
	Temp. Coefficient	X7R
Packaging Specifications		15%, 1kHz 1.0Vrms
T&R, 180mm, Plastic Tape	Reference to +25°C and 0 VDC Applied (TCC)	
Packaging Quantity 2000	Dissipation Factor	2.5% 1 kHz 1.0Vrms
	Aging Rate	3% Loss/Decade Hour: Referee Time is 1000 Hours
	1.5mm MIN 0.5mm +/-0.25mm 1210 / 3225 T&R, 180mm, Plastic Tape	1.5mm MIN Voltage DC 0.5mm +/-0.25mm Dielectric Withstanding Voltage Temperature Range Temp. Coefficient Capacitance Change with Reference to +25°C and 0 VDC Applied (TCC) Dissipation Factor

Specifications

Measurement Condition

Insulation Resistance

Capacitance

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.


Generated 11/05/2025 © 2006 - 2025 YAGEO



Aliases (C1210C222JGRAC7800) SMD Comm X7R HV, Ceramic, 2,200 pF, 5%, 2,000 VDC, X7R, SMD, MLCC, High Voltage, Temperature Stable, 1.5 mm, 1210 / 3225

Simulations


For the complete simulation environment please visit Y-SIM.

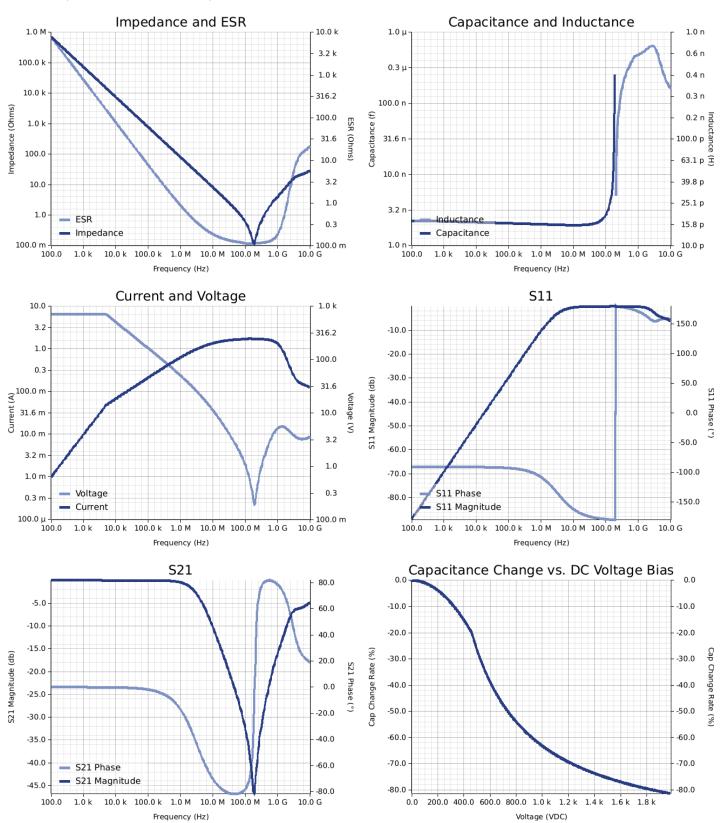


Generated 11/05/2025 © 2006 - 2025 YAGEO



Aliases (C1210C222JGRAC7800) SMD Comm X7R HV, Ceramic, 2,200 pF, 5%, 2,000 VDC, X7R, SMD, MLCC, High Voltage, Temperature Stable, 1.5 mm, 1210 / 3225

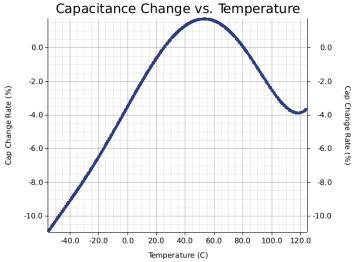

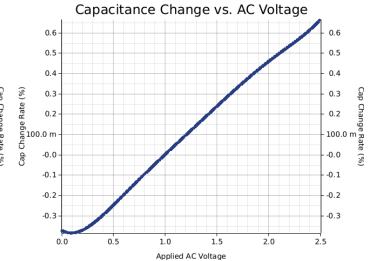

Generated 11/05/2025 © 2006 - 2025 YAGEO



Aliases (C1210C222JGRAC7800) SMD Comm X7R HV, Ceramic, 2,200 pF, 5%, 2,000 VDC, X7R, SMD, MLCC, High Voltage, Temperature Stable, 1.5 mm, 1210 / 3225

These are simulations.

This is not a specification!

The responses shown represent the typical response for each part type. Specific responses may vary, depending on manufacturing variation affects of all parameters involved, including the specified tolerances applied to capacitance and unspecified variations of ESR, ESL, and leakage resistance.

The responses shown do not represent a specified or implied maximum capability of the device for all applications.

- The ESR used for ripple "Ripple Current/Voltage vs. Frequency" plots is the ESR at ambient temperature.

- The ESR used for ripple Ripple Currenty voltage vs. Frequency plots is the ESR at ambient temperature.
 The ESR in the "Temperature Rise vs. Ripple Current" plots is adjusted to each incremental temperature rise before the power and ripple current is calculated.
 The effects shown herein are based on measured data from a multiple part sample of the parts in question.
 Ripple capability of this device will be factored by thermal resistance (Rth) created by circuit traces (addi affects of all parameters involved, including the specified tolerances applied to capacitance and unspecified variations of ESR, ESL, and leakage resistance.
 The peak voltages generated in the "Temperature Rise vs. Combined Ripple Currents" plot are calculated for each frequency and are not combined with voltages
- generated at any other harmonics.

 Please consult with the catalog or field applications engineer for maximum capability of the device in specific applications.

All product information and data (collectively, the "Information") are subject to change without notice.

KEMET K-SIM is designed to simulate behavior of components with respect to frequency, ambient temperature, and DC bias levels. The responses shown represent the typical response for each part type. Specific responses may vary, depending on manufacturing variation effects of all parameters involved, including the specified tolerances applied to capacitance and unspecified variations of ESR, ESL, and leakage resistance.

All Information given herein is believed to be accurate and reliable, but is presented without guarantee, warranty, or responsibility of any kind, expressed or implied. Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute – and we specifically disclaim – any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

If you have any questions please contact K-SIM.

Generated 11/05/2025 © 2006 - 2025 YAGEO