KEVET a YAGEO company

A-Series with C³ Technology, Radial and Axial, Ceramic Cased, High Temperature 200°C, 25 – 100 VDC (Industrial Grade)


Overview

KEMET's High Temperature A Series radial ceramic cased capacitors are designed with COG and X7R dielectrics which feature a 200°C maximum operating temperature and patented C³ technology which eliminates potential problems associated with conventional epoxy cased/potted capacitors.

These devices are ideal for power supplies, DC/DC conversion and well suited for timing, resonant, bypass, and decoupling applications. These capacitors are widely used in industries related to semiconductors, telecommunications, test/diagnostic equipment and power/grid.

Benefits

- Operating temperature range of -55°C to +200°C
- · High shock and vibration capability
- Capacitance range from 120 pF 5.6 μF in X7R
- Capacitance range from 10 pF 0.15 μF in COG
- · DC voltage ratings of 50 V and 100 V
- · High thermal stability
- Encapsulation meets flammability standard UL 94 V-0





Applications

- Downhole exploration and mining
- · Aerospace engine compartments
- · Electric ballast
- · Measuring equipment
- Inverter power supply




Ordering Information

A	С	R	06	В	103	K	G	S	
Series	Dielectric	Lead Configuration	Style/ Size	Voltage Rating	Cap. Code	Capacitance Tolerance ¹	Lead Wire Barrier Layer ²	Test Level	Packaging
A = High Temperature Axial and Radial Capacitors	C = COG R = X7R	A = Axial R = Radial	Axial: 16 25 39 50 69 Radial: 05 06 07 08	B = 50 V D = 100 V S = Special	Two significant digits and number of zeros	J = ±5% K = ±10% M = ±20%	G = Gold coated W = Solder coated	S = KEMET standard screening A = MIL-PRF-20, Group A Test (COG) A = MIL-PRF-39014 (X7R) X = Special	Blank = Waffle Tray

¹ Additional capacitance tolerance offerings may be available. Contact KEMET for details.

Dimensions - Inches (Millimeters)

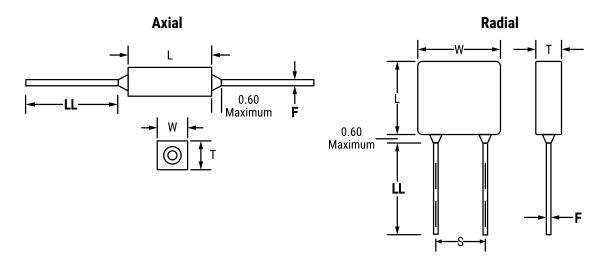

Series	Lead Configuration	Style/ Size	Length (L)	Width (W)	Thickness (T)	Lead Spacing ±0.030 (S)	Lead Diameter (F)	Lead Length Minimum (LL)			
		16	0.170 (4.32)	0.080 (2.03)	0.080 (2.03)		0.020 ±0.002				
		25	0.270 (6.86)	0.100 (2.54)	0.100 (2.54)		(0.508 ±0.051)				
	Axial	39	0.400 (10.16)	0.150 (3.81)	0.150 (3.81)						
		50		50 0.52		0.265 (6.73)	0.160 (4.06)		0.025 ±0.002 (0.635 ±0.051)		
A		69	0.720 (18.29)	0.370 (9.40)	0.160 (4.06)		(0.000 ±0.001)	0.105 (0.175)			
A		05	0.200 (5.08)	0.200 (5.08)	0.100 (2.54)	0.200 ±0.030 (5.08 ±0.76)		0.125 (3.175)			
		06	0.300 (7.62)	0.300 (7.62)	0.100 (2.54)	0.200 ±0.030 (5.08 ±0.76)	0.020 ±0.002 (0.508 ±0.051)				
	Radial	07	0.300 (7.62)	0.300 (7.62)	0.150 (3.81)	0.200 ±0.030 (5.08 ±0.76)	(0.300 ±0.031)				
		08	0.500 (12.70)	0.500 (12.70)	0.100 (2.54)	0.400 ±0.030 (10.16 ±0.76)	0.025 ±0.002				
		09	0.500 (12.70)	0.500 (12.70)	0.150 (3.81)	0.400 ±0.030 (10.16 ±0.76)	(0.635 ±0.051)				

² Please refer to the Construction section in the datasheet.



Table 1A - A Series COG Waterfall

Ту	ре				A	XIAL	(ACA	A)				RADIAL (ACR)									
Ch	de.	1	6	2	5	3	9	5	0	6	9	0	5	0	6	0	7	0	8	0	9
Sty										Volt	tage										
Capacitance	Capacitance Code	20	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	20	100
10 pF	100											Х	X								
12 pF 15 pF	120 150											X	X								
15 pF 18 pF	180											Х	X								
22 pF	220											X	X								
27 pF	270	Х	Х									X	X			İ					
33 pF	330	X	X									X	X								
39 pF	390	X	X									X	X								
47 pF	470	Х	X									Х	Х								
56 pF	560	Х	Χ	Х	Х							Χ	Х								
68 pF	680	Х	Х	Χ	Χ							Х	Х								
82 pF	820	Х	Χ	Χ	Χ							Х	Χ								
100 pF	101	Х	Χ	Χ	Χ							Χ	Χ								
120 pF	121	Х	Χ	Χ	Χ							Χ	Χ								
150 pF	151	Х	Х	Χ	Χ							Х	X								
180 pF	181	Х	Х	Х	Х							Х	Х								
220 pF	221	Х	X	Х	X	Х	X					X	X								
270 pF	271	X	X	X	X	Х	Х					X	X								
330 pF	331	X	X	X	X	X	X					X	X	X	X	Х	X				
390 pF	391	X	X	X	X	X	X					X	X	X	X	X	X				
470 pF	471	X	X	X	X	X	X					X	X	X	X	X	X				
560 pF	561	X	X	X	X	X	X	v	V			X	X	X	X	X	X	V	V	v	V
680 pF 820 pF	681 821	X	X	Х	Х	Х	X	X	X			X	X	X	Х	X	X	X	X	X	X
1,000 pF	102			X	X	X	X	X	X			X	X	X	X	X	X	X	X	X	X
1,200 pF	122			X	X	X	X	X	X			X	X	X	X	X	X	X	X	X	X
1,500 pF	152			X	X	X	X	X	X			X	X	X	X	X	X	X	X	X	X
1,800 pF	182			X	X	X	X	X	X	Х	Χ	X	X	X	X	X	X	X	X	X	X
2,200 pF	222			Х	X	Х	X	X	X	X	Х	Х	Х	Х	X	Х	X	Х	X	X	X
2,700 pF	272			Х	Х	Х	Χ	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х
3,300 pF	332			Х	Χ	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Χ	Χ
3,900 pF	392			Х	Х	Х	Х	Х	Х	Х	Χ	Х	Х	Х	Х	Х	Х	Х	Х	Х	Χ
4,700 pF	472			Х	Χ	Χ	X	Χ	Х	Х	Χ	Χ	X	Х	Х	Х	X	Х	X	Χ	Χ
5,600 pF	562					Χ	X	Χ	X	Х	Χ	Χ	Х	Х	Х	Χ	X	Х	X	Χ	Х
6,800 pF	682					Χ	X	Χ	Х	Х	Χ	Х	X	Х	Х	Х	Х	Х	X	X	Х
8,200 pF	822			L		Х	Х	Х	Х	Χ	Χ	Х	Х	Х	Х	Х	Х	Х	Х	Χ	Х
10,000 pF	103					Х	X	X	X	X	X	Х	Х	X	X	X	X	X	X	X	X
12,000 pF	123			<u> </u>		X	X	X	X	X	X			X	X	X	X	X	X	X	X
15,000 pF	153					X	X	X	X	X	X			X	X	X	X	X	X	X	X
18,000 pF	183					X	X	X	X	X	X			X	X	X	X	X	X	X	X
22,000 pF	223					X	X	X	X	X	X			X	X	X	X	X	X	X	X
27,000 pF 33,000 pF	273 333					^	٨	Х	Х	Х	Х			Х	Х	X	X	X	X	X	X
39,000 pF	393							X	X	X	Х			^	^	X	X	X	X	X	X
47,000 pF	473							X	X	X	Х					X	X	X	X	X	X
56,000 pF	563							X	X	X	X							X	X	X	X
68,000 pF	683							X	X	X	X							X	X	X	X
82,000 pF	823									X	X					l		X	X	X	X
0.1 uF	104									Х	Χ							Х	Χ	X	Х
0.12 uF	124									Χ	Χ									Χ	Х
0.15 uF	154									Χ	Χ									Χ	Х
Capacitance	Capacitance Code	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100
Sty		1	6	2	5	3	9	5	0	6	69 05 06 07 08 09										
Ту	ре					Axial	(ACA)					Radial (ACR)									



Table 1B - A Series X7R Waterfall

Capacitance	Ту	ре				Α	XIAL	(AR	A)							R	ADIAI	L (AR	R)			
Capacitance Code Code	C+	vlo	1	6	2	5	3	9	5	0	6	9	0	5	0	6	0	7	0	8	0	9
120 pf 151	St	yie										Volt	age									
199 pf 151		Code	20	100	20	100	20	100	20	100	20	100			20	100	20	100	20	100	20	100
1890 pf 181																						
270 pF 271																						
Sagp F Sag																						
399 pt 391																						
Series S																						
September Sept																						
Base Fig. September Se			Y	Y																		
1200 F 132																						
1500 pf 152	1000 pF	102	Х	Х									Χ	Х								
1800 F 182															-		-					
2700 pF 222																	\vdash					
3300 pF 332	2200 pF	222	Χ	Х									Χ	Х								
3900 F 392																						
## A700 F					Х	Х																
Second F	4700 pF	472	Х	Χ	Χ	Х							Χ	Х								
R200p F																						
10000 pF																						
1500 pF			Х												Х	Х	Х	Х				
1830							.,															
22000 pF 223			Х	X																		
33000 pF 333																						
39000 pF																						
A7000 pF								-														
Second pf 683																						
82000 pF 823																						
0.1 uF 104										_												
0.12 uF											Х	Х										
0.18 uF	0.12 uF				Х		Χ		Х		Х		Χ		Х		Х		Х			Χ
0.22 uF 224																						
0.27 uF																						
0.39 uF 394	0.27 uF	274					Х	Х	Х	Х	Х	Х	Χ	Х	Х	Х	Х	Х	Х	Х	Х	Χ
0.47 uF													Χ	X								
O.56 uF S64										_												
0.82 uF	0.56 uF	564					Χ	Х	Х	Х	Х	Х			Х	Х	Χ	Х	Х	Х	Х	Χ
1 uF 105 X <td></td>																						
1.2 uF 125							X	X														
1.8 uF 185	1.2 uF	125							Х	Х	Х	Х					Χ	Χ	Х	Χ	Х	Χ
2.2 uF 225																						
2.7 uF 275																	X	X				
3.9 uF 395	2.7 uF	275								, n	Х	Х									Х	Χ
4.7 uF 475 365 365 37																						
5.6 uF 565 X<																						
Style 16 25 39 50 69 05 06 07 08 09												Χ										
	Capacitance	Capacitance Code	50	100	50	100		_	20	100	20	100	50	100	20	100			20	100	20	100
Type Axial (ARA) Radial (ARR)	St	yle									0	9										
	Ту	ре					Axial	(ARA)									Radial	(ARR)				




Soldering Process

Recommended Soldering Technique:

- · Solder Wave
- Hand Soldering (Manual)


Recommended Soldering Profile:

· Optimum Wave Solder Profile

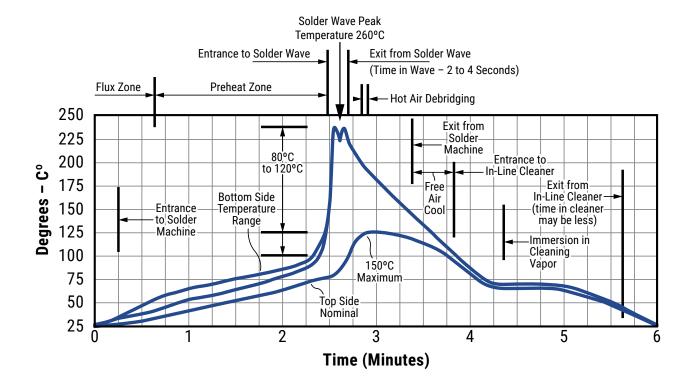

Hand Soldering (Manual)

Manual Solder Profile with Pre-heating

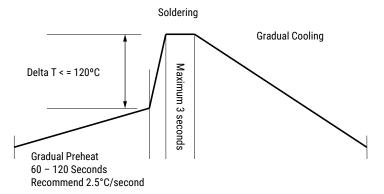

KEMET recommends following the guidelines and techniques outlined in technical bulletins F2103 and F9207.



Table 2 – Performance & Reliability: Test Methods and Conditions

Stress	Reference	Test Condition	Limits				
Visual & Mechanical	KEMET Internal	No defects that may affect performance (10X)	Dimensions according KEMET Spec Sheet				
Capacitance (Cap)	MIL-STD-202 Method 305	C ≤ 100 pF: 1 MHz \pm 100 kHz and 1.0 \pm 0.2 V $_{RMS}$ C > 100 pF: 1 kHz \pm 100 Hz and 1.0 \pm 0.2 V $_{RMS}$	Dimensions according KEMET Spec Sheet				
Dissipation Factor (DF)	KEMET Internal	$C \le 100 \text{ pF: } 1 \text{ MHz } \pm 100 \text{ kHz and } 1.0 \pm 0.2 \text{ V}_{\text{RMS}}$ $C > 100 \text{ pF: } 1 \text{ kHz } \pm 100 \text{ Hz and } 1.0 \pm 0.2 \text{ V}_{\text{RMS}}$	X7R: 2.5% C0G: 0.15%				
Insulation Resistance (IR)	MIL-STD-202 Method 302	Apply rated voltage for 120 seconds at 25°C	Within Specification To obtain IR limit, divide $M\Omega$ - μ F value by the capacitance and compare to $G\Omega$ limit. Select the lower of the two limits. 100 $G\Omega$ or 1,000 Megohm-microfarad, whichever is less.				
Temperature Coefficient of Capacitance (TCC)	KEMET Internal	C0G: 0 ppm/°C ±30 ppm/°C X7R: ±15%	Within Specification				
Dielectric Withstanding Voltage (DWV)	KEMET Internal	250% of rated voltage (5±1 seconds and charge/discharge not exceeding 50 mA)	Withstand test voltage without insulation breakdown or damage.				
Aging Rate (Maximum % Capacitance Loss/ Decade Hour)	KEMET Internal	Capacitance measurements (including tolerance) are indexed to a referee time of 48 or 1,000 hours. Please refer to a part number specific datasheet for referee time details.	Please refer to a part number specification sheet for specific Aging rate				
Terminal Strength	MIL-STD-202 Method 211	Applied force: 5 pounds (2.3 kg)	No evidence of mechanical damage				
Solderability	MIL-STD-202 Method 208	Condition: 4 hours ±15 minutes at 155°C dry bake apply all methods Test 245 ± 5°C (SnPb & Pb-Free)	Visual Inspection. 95% coverage on termination. No leaching				
Temperature Cycling	JESD22 Method JA-104	1,000 cycles (-55°C to +200°C) 2 - 3 cycles per hour Soak Time: 1 or 5 minutes	Measurement at 24 hours ±4 hours after test conclusion. Cap: Initial Limit DF: Initial Limit IR: Initial Limit				
Moisture Resistance	MIL-STD-202 Method 106	Number of cycles required 10, 24 hours per cycle. Steps 7a and 7b not required	Visual examination: No mechanical damage. Marking shall remain legible Measurement at 24 hours ±4 hours after test conclusion. Within Post Environmental Limits Cap (C0G): ±0.3% or ±0.25 pF shift Cap(X7R): ±20% IR: 10% of Initial Limit DF Limits Maximum (C0G): 0.25 % DF Limits Maximum (X7R): 3 %				



Table 2 - Performance & Reliability: Test Methods and Conditions cont.

Thermal Shock	MIL-STD-202 Method 107	Number of cycles required 5, (-55°C to 150°C) Dwell time 15 minutes.	Cap: Initial Limit DF: Initial Limit IR: Initial Limit		
High Temperature Life	MIL-STD-202	1,000 hours at + 200°C, +4°C, -0°C. with rated voltage, ±5 percent.	Measurement at 24 hours +/- 4 hours after test conclusion. Within Post Environmental Limits Cap (C0G): ±0.3% or ±0.25 pF shift Cap(X7R): ±20% IR: 10% of Initial Limit DF Limits Maximum (C0G): 0.25 % DF Limits Maximum (X7R): 3 %		
Storage Life	Method 108	1,000 hours at 200°C, Unpowered			
Vibration	MIL-STD-202 Method 204	100 g's 6 ms Half-sine, Velocity Change 12.3 feet/second (Condition C)	Cap: Initial Limit DF: Initial Limit IR: Initial Limit		
Mechanical Shock	MIL-STD-202 Method 213	1,500 g's 0.5 ms Half-sine, Velocity Change 15.4 feet/second (Condition F)	Cap: Initial Limit DF: Initial Limit IR: Initial Limit		

Packaging Quantities


Style	Waffle Pack Quantity	Style	Waffle Pack Quantity
ACR05	56	ACA16	25
ACR06	28	ACA25	25
ACR07	28	ACA39	25
ACR08	20	ACA50	25
ACR09	20	ACA69	25
ARR05	56	ARA16	25
ARR06	28	ARA25	25
ARR07	28	ARA39	25
ARR08	20	ARA50	25
ARR09	20	ARA69	25



Storage & Handling

The un-mounted storage life of a leaded ceramic capacitor is dependent upon storage and atmospheric conditions as well as packaging materials. While the ceramic chips enveloped under the epoxy coating themselves are quite robust in most environments, solderability of the wire lead on the final epoxy-coated product will be degraded by exposure to high temperatures, high humidity, corrosive atmospheres, and long term storage. In addition, packaging materials will be degraded by high temperature and exposure to direct sunlight—reels may soften or warp, and tape peel force may increase.


KEMET recommends storing the un-mounted capacitors in their original packaging, in a location away from direct sunlight, and where the temperature and relative humidity do not exceed 40 degrees centigrade and 70% respectively. For optimum solderability, capacitor stock should be used promptly, preferably within 18 months of receipt. For applications requiring pre-tinning of components, storage life may be extended if solderability is verified. Before cleaning, bonding or molding these devices, it is important to verify that your process does not affect product quality and performance. KEMET recommends testing and evaluating the performance of a cleaned, bonded or molded product prior to implementing and/or qualifying any of these processes.

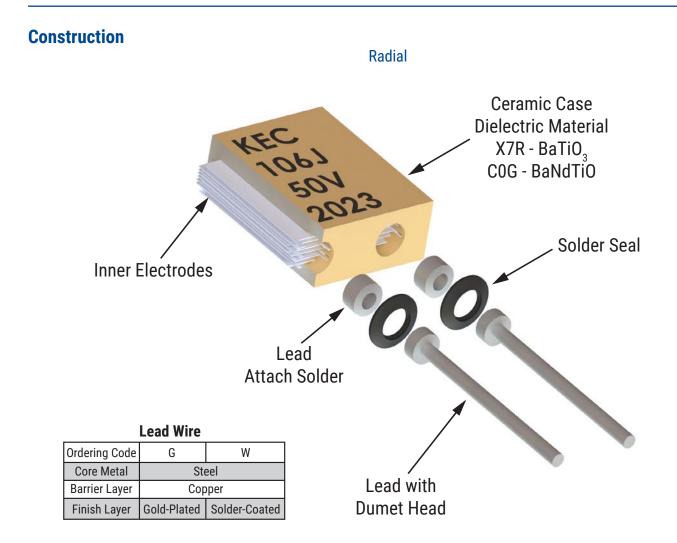




Construction cont.

Axial

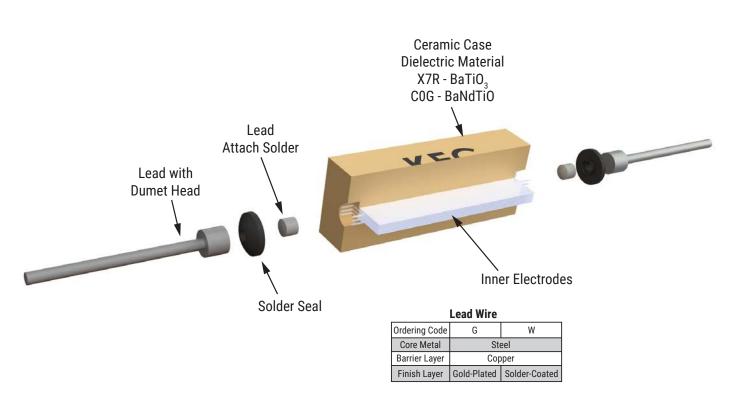

Marking

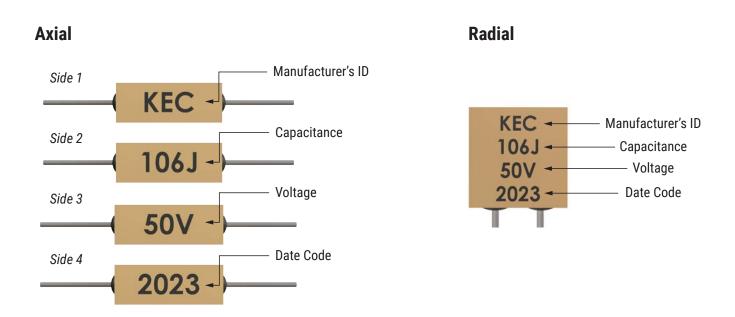



KEMET Electronics Corporation Sales Offices

For a complete list of our global sales offices, please visit www.kemet.com/sales.

Disclaimer

YAGEO Corporation and its affiliates do not recommend the use of commercial or automotive grade products for high reliability applications or manned space flight.

All product specifications, statements, information and data (collectively, the "Information") in this datasheet are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KEMET Electronics Corporation's ("KEMET") knowledge of typical operating conditions for such applications, but are not intended to constitute – and KEMET specifically disclaims – any warranty concerning suitability for a specific customer application or use. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KEMET with reference to the use of KEMET's products is given gratis, and KEMET assumes no obligation or liability for the advice given or results obtained.

Although KEMET designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required.