


FLLD3320APV11

Aliases (LLD3320APV11)

Obsolete

EMI Filters, KEMET, FLLD3-PV, Chassis Mount, Noise Suppression, 300x210x115mm

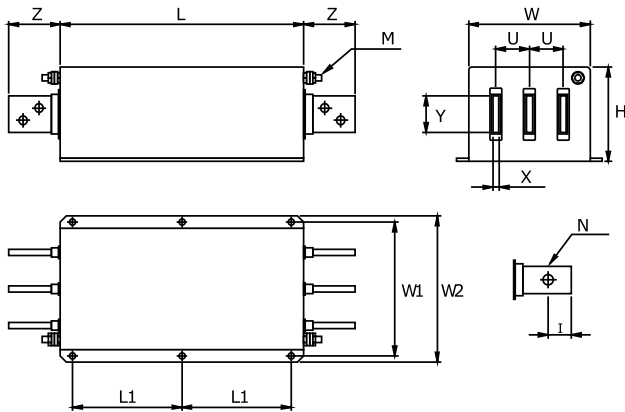

Click [here](#) for the 3D model.

General Information

| | |
|----------------|---|
| Series | FLLD3-PV |
| Style | Chassis Mount |
| Description | EMI Filter, Chassis Mount, With Y Capacitor |
| Features | Three Phase, High Performance, High Voltage |
| Phase | Three-phase |
| RoHS | Yes |
| Qualifications | IEC/EN 60939, UL 1283 |
| AEC-Q200 | No |
| Lead | Threaded Studs M12 |
| Terminal Type | Threaded Studs M12 |

Dimensions

| | |
|-----------|--------------------|
| L | 300mm NOM |
| W | 210mm NOM |
| H | 115mm NOM |
| L1 | 120mm NOM |
| W1 | 235mm NOM |
| W2 | 260mm NOM |
| M (Earth) | Threaded Studs M12 |
| Lead | Threaded Studs M12 |

Packaging Specifications

| | |
|--------------------------|----------|
| Packaging | Bulk |
| Packaging Quantity | 1 |
| Typical Component Weight | 10,000 g |

Specifications

| | |
|--------------------------|-------------------|
| Voltage AC | 520 VAC |
| Rated Frequency | 50-60 Hz |
| Rated Current | 320 A (50°C) |
| Ripple Current | 320 A (50°C) |
| Rated Temperature | 50°C |
| Temperature Range | -40/+100°C |
| Climate Category | 40/100/21 |
| Test Voltage DC (P to P) | 2250 VDC |
| Test Voltage DC (P to E) | 3000 VDC |
| Max Power Loss | 15 W (25°C 50 Hz) |
| Leakage Current | 5 mA |

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.