



FRONT VIEW

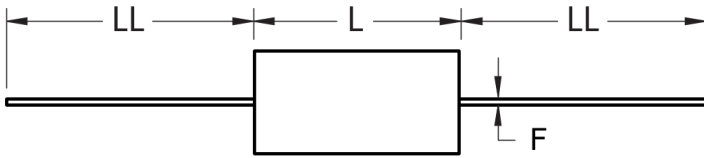

SIDE VIEW



Click [here](#) for the 3D model.

Dimensions

D	20mm MAX
L	33mm MAX
F	1mm +/-0.05mm

Packaging Specifications

Packaging	T&R
Packaging Quantity	150

General Information

Series	A72
Dielectric	Film/Foil Polypropylene
Style	Axial
RoHS	Yes
Lead	Wire Leads
AEC-Q200	No
Miscellaneous	Above 85C DC And AC Voltage Derating Is 1.25%/C. maxKO = 28000000.

Specifications

Capacitance	0.033 uF
Capacitance Tolerance	10%
Voltage DC	2000 VDC, 1500 VDC (105C)
Voltage AC	500 VAC
Temperature Range	-55/+105°C
Rated Temperature	85°C
Dissipation Factor	0.05% 10kHz, 0.1% 100kHz
Insulation Resistance	100 GOhms
Max dV/dt	7000 V/us
Inductance	33 nH