



SMD Auto X7R VW80808, Ceramic, 3,300 pF, 10%, 250 VDC, X7R, SMD, MLCC, Automotive Grade, 0805, 0.7 mm



S	S	Qualifications	
		AEC-Q200	
	Click here for the 3D model.	Typical Compo	
Dimensions		Specifications	
Dimensions Chip Size	0805	Specifications Capacitance	
	0805 2mm +/-0.3mm	·	
Chip Size		Capacitance	
Chip Size	2mm +/-0.3mm	Capacitance Tolerance	

0.7mm MIN

0.5mm +/-0.25mm

Packaging Specifications		
Packaging	T&R, 180mm, Plastic Tape	
Packaging Quantity	4000	

S

В

General Information			
Series	SMD Auto X7R VW80808		
Style	SMD Chip		
Description	SMD, MLCC, Automotive Grade		
Features	VW 80808 Specification Compliant		
RoHS	Yes		
Termination	Flexible Termination		
Failure Rate	N/A		
Qualifications	AEC-Q200		
AEC-Q200	Yes		
Typical Component Weight	13 mg		
Shelf Life	152 Weeks		

Specifications			
Capacitance	3,300 pF		
Tolerance	10%		
Voltage DC	250 VDC		
Dielectric Withstanding Voltage	625 VDC		
Temperature Range	-55/+125°C		
Temp. Coefficient	X7R		
Capacitance Change with Reference to +25°C and 0 VDC Applied (TCC)	15%, 1kHz 1.0Vrms		
Dissipation Factor	2.5% 1 kHz 1.0Vrms		
Insulation Resistance	100 GOhms		

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

Generated 08/21/2025 © 2006 - 2025 YAGEO








SMD Auto X7R VW80808, Ceramic, 3,300 pF, 10%, 250 VDC, X7R, SMD, MLCC, Automotive Grade, 0805, 0.7 mm


Simulations


For the complete simulation environment please visit Y-SIM.

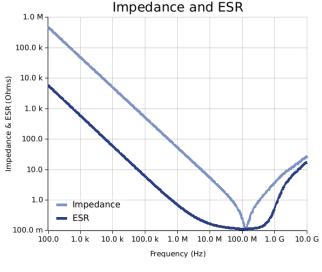


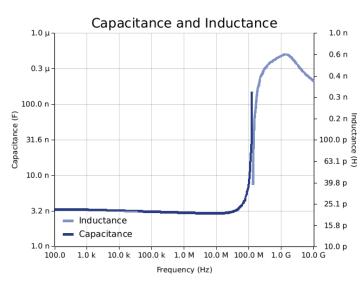

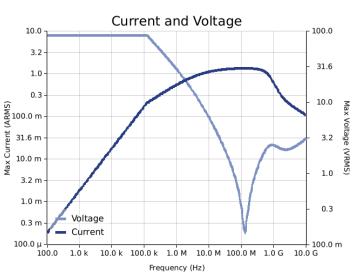

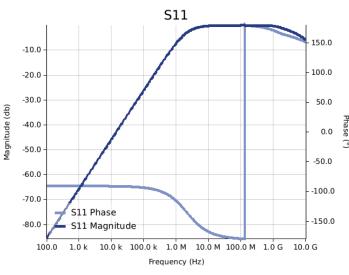

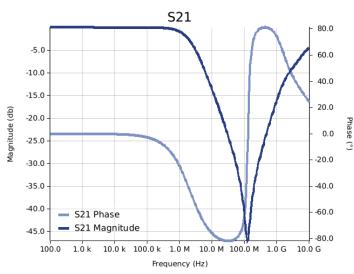

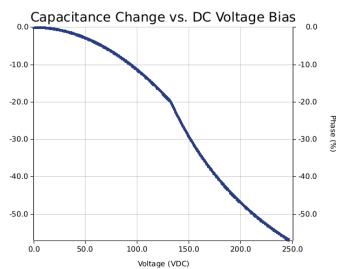


Generated 08/21/2025 © 2006 - 2025 YAGEO






SMD Auto X7R VW80808, Ceramic, 3,300 pF, 10%, 250 VDC, X7R, SMD, MLCC, Automotive Grade, 0805, 0.7 mm



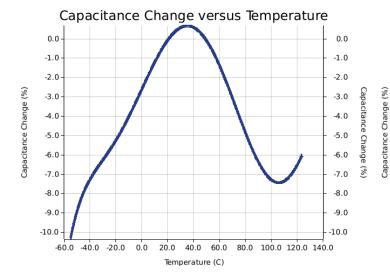

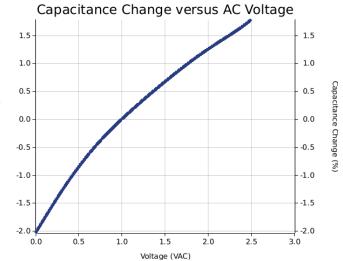

Generated 08/21/2025 © 2006 - 2025 YAGEO



C0805X332KARAC3316

SMD Auto X7R VW80808, Ceramic, 3,300 pF, 10%, 250 VDC, X7R, SMD, MLCC, Automotive Grade, 0805, 0.7 mm

These are simulations.

This is not a specification!

The responses shown represent the typical response for each part type. Specific responses may vary, depending on manufacturing variation affects of all parameters involved, including the specified tolerances applied to capacitance and unspecified variations of ESR, ESL, and leakage resistance.

The responses shown do not represent a specified or implied maximum capability of the device for all applications.

- The ESR used for ripple "Ripple Current/Voltage vs. Frequency" plots is the ESR at ambient temperature.

- The ESR used for ripple Ripple Currenty voltage vs. Frequency plots is the ESR at ambient temperature.
 The ESR in the "Temperature Rise vs. Ripple Current" plots is adjusted to each incremental temperature rise before the power and ripple current is calculated.
 The effects shown herein are based on measured data from a multiple part sample of the parts in question.
 Ripple capability of this device will be factored by thermal resistance (Rth) created by circuit traces (addi affects of all parameters involved, including the specified tolerances applied to capacitance and unspecified variations of ESR, ESL, and leakage resistance.
 The peak voltages generated in the "Temperature Rise vs. Combined Ripple Currents" plot are calculated for each frequency and are not combined with voltages
- generated at any other harmonics.

 Please consult with the catalog or field applications engineer for maximum capability of the device in specific applications.

All product information and data (collectively, the "Information") are subject to change without notice.

KEMET K-SIM is designed to simulate behavior of components with respect to frequency, ambient temperature, and DC bias levels. The responses shown represent the typical response for each part type. Specific responses may vary, depending on manufacturing variation effects of all parameters involved, including the specified tolerances applied to capacitance and unspecified variations of ESR, ESL, and leakage resistance.

All Information given herein is believed to be accurate and reliable, but is presented without guarantee, warranty, or responsibility of any kind, expressed or implied. Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute – and we specifically disclaim – any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

If you have any questions please contact K-SIM.

Generated 08/21/2025 © 2006 - 2025 YAGEO