


## SMC10.2684J50A31TR16

Aliases (F125WP684J050V, SMC100ZA6680JA31T1)

SMC/F125, Film, Metallized PPS, General Purpose, 0.68 uF, 5%, 30 VAC, 50 VDC, 100°C, 4036, 5.5mm

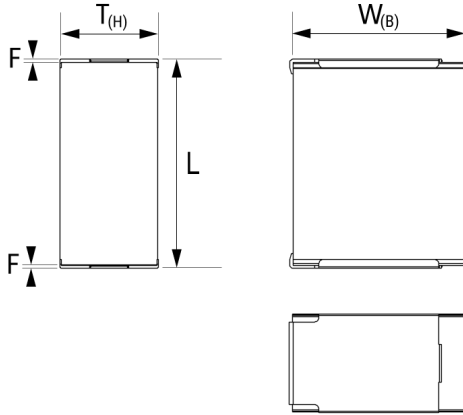

Note: '()' correspond to the letters used in the product bulletin

Click [here](#) for the 3D model.

### Dimensions

Chip Size	4036
L	10.2mm +/-0.2mm
W	9.1mm +/-0.2mm
T	5.5mm +/-0.2mm
F	0.5mm NOM

### Packaging Specifications

Packaging	T&R
Packaging Quantity	800

### General Information

Series	SMC/F125
Dielectric	Metallized PPS
Style	SMD Chip
Features	High Stability
RoHS	Yes
AEC-Q200	No
Typical Component Weight	1.591 g
Shelf Life	104 Weeks
MSL	2

### Specifications

Capacitance	0.68 uF
Capacitance Tolerance	5%
Voltage AC	30 VAC
Voltage DC	50 VDC
Temperature Range	-55/+125°C
Rated Temperature	100°C
Dissipation Factor	0.15% 1kHz, 0.25% 10kHz, 0.6% 100kHz
Insulation Resistance	7.3529 GOhms
Max dV/dt	4 V/us