


## T356A104J035AS7301

Aliases (T356A104J035ASTR)

T356, Tantalum, MnO<sub>2</sub> Tantalum, Commercial Grade, 0.1 uF, 5%, 35 VDC, Radial, Solid Tantalum, Conformal, Dipped, 5.08mm

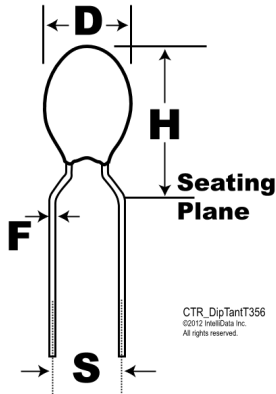

Click [here](#) for the 3D model.

Dimensions	
D	4.5mm
H	8.6mm
S	5.08mm +/-0.38mm
F	0.5mm +/-0.05mm

Packaging Specifications	
Packaging	T&R, 305mm
Packaging Quantity	1500

General Information	
Series	T356
Dielectric	MnO <sub>2</sub> Tantalum
Style	Radial
Description	Radial, Solid Tantalum, Conformal, Dipped
Features	Low Leakage, Reverse Voltage
RoHS	No
Prop 65	<b>WARNING:</b> Cancer and reproductive harm - <a href="http://www.p65warnings.ca.gov">http://www.p65warnings.ca.gov</a> .
Termination	Lead (SnPb)
AEC-Q200	No
Construction	Conformal
Notes	Longest Lead Is Positive.

Specifications	
Capacitance	0.1 uF
Capacitance Tolerance	5%
Voltage DC	35 VDC (85C), 23 VDC (125C), 0.35 VDC (125C Reverse)
Temperature Range	-55/+125°C
Dissipation Factor	3%
Leakage Current	0.5 uA